

NATIONAL FLOOD INSURANCE PROGRAM

ELEVATION CERTIFICATE

AND

INSTRUCTIONS

2019 EDITION

OMB No. 1660-0008

Expiration Date: November 30, 2022

U.S. DEPARTMENT OF HOMELAND SECURITY Federal Emergency Management Agency National Flood Insurance Program

ELEVATION CERTIFICATE AND INSTRUCTIONS

Paperwork Reduction Act Notice

Public reporting burden for this data collection is estimated to average 3.75 hours per response. The burden estimate includes the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and submitting this form. You are not required to respond to this collection of information unless a valid OMB control number is displayed on this form. Send comments regarding the accuracy of the burden estimate and any suggestions for reducing the burden to: Information Collections Management, Department of Homeland Security, Federal Emergency Management Agency, 500 C Street SW, Washington, DC 20742, Paperwork Reduction Project (1660-0008). NOTE: Do not send your completed form to this address.

Privacy Act Statement

Authority: Title 44 CFR § 61.7 and 61.8.

Principal Purpose(s): This information is being collected for the primary purpose of estimating the risk premium rates necessary to provide flood insurance for new or substantially improved structures in designated Special Flood Hazard Areas.

Routine Use(s): The information on this form may be disclosed as generally permitted under 5 U.S.C. § 552a(b) of the Privacy Act of 1974, as amended. This includes using this information as necessary and authorized by the routine uses published in DHS/FEMA-003 – National Flood Insurance Program Files System or Records Notice 73 Fed. Reg. 77747 (December 19, 2008); DHS/FEMA/NFIP/LOMA-1 – National Flood Insurance Program (NFIP) Letter of Map Amendment (LOMA) System of Records Notice 71 Fed. Reg. 7990 (February 15, 2006); and upon written request, written consent, by agreement, or as required by law.

Disclosure: The disclosure of information on this form is voluntary; however, failure to provide the information requested may result in the inability to obtain flood insurance through the National Flood Insurance Program or the applicant may be subject to higher premium rates for flood insurance. Information will only be released as permitted by law.

Purpose of the Elevation Certificate

The Elevation Certificate is an important administrative tool of the National Flood Insurance Program (NFIP). It is to be used to provide elevation information necessary to ensure compliance with community floodplain management ordinances, to determine the proper insurance premium rate, and to support a request for a Letter of Map Amendment (LOMA) or Letter of Map Revision based on fill (LOMR-F).

The Elevation Certificate is required in order to properly rate Post-FIRM buildings, which are buildings constructed after publication of the Flood Insurance Rate Map (FIRM), located in flood insurance Zones A1–A30, AE, AH, A (with BFE), VE, V1–V30, V (with BFE), AR, AR/A, AR/AE, AR/A1–A30, AR/AH, and AR/AO. The Elevation Certificate is not required for Pre-FIRM buildings unless the building is being rated under the optional Post-FIRM flood insurance rules.

As part of the agreement for making flood insurance available in a community, the NFIP requires the community to adopt floodplain management regulations that specify minimum requirements for reducing flood losses. One such requirement is for the community to obtain the elevation of the lowest floor (including basement) of all new and substantially improved buildings, and maintain a record of such information. The Elevation Certificate provides a way for a community to document compliance with the community's floodplain management ordinance.

Use of this certificate does not provide a waiver of the flood insurance purchase requirement. Only a LOMA or LOMR-F from the Federal Emergency Management Agency (FEMA) can amend the FIRM and remove the Federal mandate for a lending institution to require the purchase of flood insurance. However, the lending institution has the option of requiring flood insurance even if a LOMA/LOMR-F has been issued by FEMA. The Elevation Certificate may be used to support a LOMA or LOMR-F request. Lowest floor and lowest adjacent grade elevations certified by a surveyor or engineer will be required if the certificate is used to support a LOMA or LOMR-F request. A LOMA or LOMR-F request must be submitted with either a completed FEMA MT-EZ or MT-1 package, whichever is appropriate.

This certificate is used only to certify building elevations. A separate certificate is required for floodproofing. Under the NFIP, non-residential buildings can be floodproofed up to or above the Base Flood Elevation (BFE). A floodproofed building is a building that has been designed and constructed to be watertight (substantially impermeable to floodwaters) below the BFE. Floodproofing of residential buildings is not permitted under the NFIP unless FEMA has granted the community an exception for residential floodproofed basements. The community must adopt standards for design and construction of floodproofed basements before FEMA will grant a basement exception. For both floodproofed non-residential buildings and residential floodproofed basements in communities that have been granted an exception by FEMA, a floodproofing certificate is required.

Additional guidance can be found in FEMA Publication 467-1, Floodplain Management Bulletin: Elevation Certificate, available on FEMA's website at https://www.fema.gov/media-library/assets/documents/3539?id=1727.

U.S. DEPARTMENT OF HOMELAND SECURITY Federal Emergency Management Agency National Flood Insurance Program

OMB No. 1660-0008 Expiration Date: November 30, 2022

ELEVATION CERTIFICATE

Important: Follow the instructions on pages 1–9.

Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance agent/company, and (3) building owner.

	SEC	TION A - PROPERTY	/ INFOR	MATION		FOR INSUR	RANCE COMPANY USE
A1. Building Owner Terry Braxton						Policy Num	ber:
A2. Building Stree Box No. 150 East Firs	- 22 - 2	cluding Apt., Unit, Sui	te, and/o	or Bldg. No.) o	r P.O. Route and	Company N	IAIC Number:
City Boca Grande				State Florida		ZIP Code 33921	
		and Block Numbers, Ta otion O.R.I. 20180000			gal Description, e	etc.)	
A4. Building Use (e.g., Resider	ntial, Non-Residential,	Addition	, Accessory,	etc.) Residen	ial	
A5. Latitude/Longi	tude: Lat. <u>N</u>	1.26*- 44'-46.5"	Long. V	V.82*-15'-33.6	" Horizont	al Datum: NAD 1	1927 🗷 NAD 1983
A6. Attach at least	2 photograp	hs of the building if the	e Certific	cate is being u	used to obtain flo	od insurance.	
A7. Building Diagra	am Number	7					
A8. For a building	with a crawls	space or enclosure(s):					
a) Square foo	tage of craw	Ispace or enclosure(s)	0		2241.00 sq ft		
b) Number of	permanent fl	ood openings in the cr	awlspac	e or enclosur	e(s) within 1.0 foo	ot above adjacent gra	ade 90
c) Total net ar	ea of flood o	penings in A8.b	3	3499.00 sq ir	Î		
d) Engineered	I flood openir	ngs? 🗌 Yes 🕱 N	No				
A9. For a building v	vith an attacl	ned garage:					
a) Square foot	age of attach	ned garage		385.00 sq ft			
b) Number of	permanent flo	ood openings in the at	tached g	arage within	1.0 foot above ac	ljacent grade 3	
c) Total net an	ea of flood o	penings in A9.b		408.00 sq	in		
d) Engineered	flood openin	igs? X Yes N	10				
P4 NEID Commun		ECTION B – FLOOD I	NSURA			FORMATION	DO OLI
TOTAL SAME STOCKED BY AND ADMINISTRATION OF THE PARTY OF	County 125	Community Number 124		B2. County	Name Lee		B3. State Florida
D4 Man/Danal	DE C. #:	DC FIDM Index	D7 E15	DA David	D0 E1 1	D0 D EL LE	
B4. Map/Panel Number	B5. Suffix	B6. FIRM Index Date	Effe	RM Panel ective/	B8. Flood Zone(s)	B9. Base Flood E (Zone AO, use	e Base Flood Depth)
12071C0182	F	08-28-2008	08-28-2	vised Date 2008	AE	10.0'	
B10. Indicate the s	ource of the	Base Flood Elevation	(BFE) da	ata or base flo	ood depth entere	d in Item B9:	
☐ FIS Profile	FIRM	Community Determined	mined [Other/Sou	rce:		
B11. Indicate eleva	ation datum u	used for BFE in Item B	9: 🗌 N	GVD 1929	▼ NAVD 1988	Other/Source:	
B12. Is the building	g located in a	a Coastal Barrier Reso	urces Sy	stem (CBRS) area or Otherwi	se Protected Area (C	PA)? Yes X No
Designation I	Date:	П	CBRS	□ ОРА		•	

ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy the corresponding	information from S	ection A.	FOR II	NSURANC	E COMPANY USE
Building Street Address (including Apt., Unit, Suite, and/or 150 East First Street	Bldg. No.) or P.O. Ro	oute and Box No.	Policy	Number:	
City State Boca Grande Flori		P Code 921	Compa	any NAIC N	Number
SECTION C – BUILDING ELE	VATION INFORMA	TION (SURVEY RE	EQUIRE	ĒD)	
C1. Building elevations are based on: Construction *A new Elevation Certificate will be required when co C2. Elevations – Zones A1–A30, AE, AH, A (with BFE), V Complete Items C2.a–h below according to the buildi Benchmark Utilized: N.G.S. 12-81- A15 Indicate elevation datum used for the elevations in ite NGVD 1929 NAVD 1988 Other/S Datum used for building elevations must be the same	onstruction of the build VE, V1–V30, V (with ing diagram specified Vertical Datumens a) through h) becource:	BFE), AR, AR/A, AR/ d in Item A7. In Puert n: N.A.V.D. 1988 ow.	AE, AR/	 /A1–A30, A	
	_				asurement used.
a) Top of bottom floor (including basement, crawlspa	ace, or enclosure floo	or)	4.5	x feet	meters
b) Top of the next higher floor			11.2	x feet	☐ meters
c) Bottom of the lowest horizontal structural member	r (V Zones only)	Santa	N/A	x feet	☐ meters
d) Attached garage (top of slab)			4.5	x feet	☐ meters
 e) Lowest elevation of machinery or equipment servi (Describe type of equipment and location in Comr 	icing the building ments)		11.1	x feet	meters
f) Lowest adjacent (finished) grade next to building ((LAG)		4.4	x feet	meters
g) Highest adjacent (finished) grade next to building	(HAG)		6.5	x feet	meters
h) Lowest adjacent grade at lowest elevation of deck structural support	or stairs, including		N/A	x feet	meters
SECTION D - SURVEYOR, I	ENGINEER, OR AF	CHITECT CERTIFI	CATIO	N	
This certification is to be signed and sealed by a land surval certify that the information on this Certificate represents a statement may be punishable by fine or imprisonment und Were latitude and longitude in Section A provided by a lice	my best efforts to inte der 18 U.S. Code, Se	erpret the data availa ction 1001.	ble. I un	derstand ti	ation information. hat any false if attachments.
Certifier's Name	License Number	700			30000
Warren A. McLeod	485	55		111111111	A. Mo
Title Professional Surveyor and Mapper Company Name DMK Associates Inc.			NATION PROPERTY.	S. S.	AA. MCLANA AND AND AND AND AND AND AND AND AND
Address 4315 South Access Road				ST FL	ATE OF ORIDA
City Englewood	State Florida	ZIP Code 34224		SINGULATION S	Surveyor Surveyore
Signature WARREN A. WARREN A. MCLEOD MCLEOD 2020.07.23 14:17:30 -04'00'	Date 07-23-2020	Telephone (941) 475-6596	Ext.		
Copy all pages of this Elevation Certificate and all attachmen	nts for (1) community	official, (2) insurance a	igent/cor	mpany, and	d (3) building owner.
Comments (including type of equipment and location, per of the Lat. and Long. Coordinates were determined by a W.F. C2-E, Represents the outside A/C unit located along the si C2-A, Represents unfinished enclosed area and the elevat The Garage area has three openings contain Engineered for A total of 600 square feet. The lower enclosed area cor This document has been signed by digital signature. DMK File No. 18-103 F.B.20-09 Pg.28	A.A.S. enabled hand ide of the structure. tion is more or less. Smart Vents model n	o. 1540-520 rated fo			

ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy the corresponding	g information from Sec	ction A.	FOR INSURANCE COMPANY USE
Building Street Address (including Apt., Unit, Suite, and/o 150 East First Street	or Bldg. No.) or P.O. Rou	ite and Box No.	Policy Number:
	ate ZIP orida 339	Code 21	Company NAIC Number
SECTION E – BUILDING ELE FOR ZONE	VATION INFORMATIO AO AND ZONE A (WIT		REQUIRED)
For Zones AO and A (without BFE), complete Items E1–I complete Sections A, B, and C. For Items E1–E4, use nat enter meters.			
E1. Provide elevation information for the following and countries the highest adjacent grade (HAG) and the lowest ad a) Top of bottom floor (including basement,		es to show whether	r the elevation is above or below
crawlspace, or enclosure) is b) Top of bottom floor (including basement,		feet meter	s above or below the HAG.
crawlspace, or enclosure) is		feet meter	
E2. For Building Diagrams 6–9 with permanent flood oper the next higher floor (elevation C2.b in the diagrams) of the building is	enings provided in Section	on A Items 8 and/or	
E3. Attached garage (top of slab) is		feet meter	
E4. Top of platform of machinery and/or equipment servicing the building is		feet meter	s 🗌 above or 🔲 below the HAG.
E5. Zone AO only: If no flood depth number is available, floodplain management ordinance? Yes I			cordance with the community's certify this information in Section G.
SECTION F - PROPERTY OWNE	R (OR OWNER'S REP	RESENTATIVE) CE	RTIFICATION
The property owner or owner's authorized representative community-issued BFE) or Zone AO must sign here. The	who completes Sections statements in Sections	s A, B, and E for Zo A, B, and E are cor	ne A (without a FEMA-issued or ect to the best of my knowledge.
Property Owner or Owner's Authorized Representative's	Name	1	
Address	City	Sta	ate ZIP Code
Signature	Date	Te	ephone
Comments			
			Check here if attachments.

ELEVATION CERTIFICATE

OMB No. 1660-0008

Expiration Date: November 30, 2022 IMPORTANT: In these spaces, copy the corresponding information from Section A. FOR INSURANCE COMPANY USE Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No. Policy Number: 150 East First Street City State ZIP Code Company NAIC Number Boca Grande Florida 33921 SECTION G - COMMUNITY INFORMATION (OPTIONAL) The local official who is authorized by law or ordinance to administer the community's floodplain management ordinance can complete Sections A, B, C (or E), and G of this Elevation Certificate. Complete the applicable item(s) and sign below. Check the measurement used in Items G8-G10. In Puerto Rico only, enter meters. The information in Section C was taken from other documentation that has been signed and sealed by a licensed surveyor, engineer, or architect who is authorized by law to certify elevation information. (Indicate the source and date of the elevation data in the Comments area below.) A community official completed Section E for a building located in Zone A (without a FEMA-issued or community-issued BFE) or Zone AO. G3. The following information (Items G4–G10) is provided for community floodplain management purposes. G4. Permit Number G5. Date Permit Issued G6. Date Certificate of Compliance/Occupancy Issued G7. This permit has been issued for: Elevation of as-built lowest floor (including basement) of the building: feet meters Datum G9. BFE or (in Zone AO) depth of flooding at the building site: feet meters Datum feet meters G10. Community's design flood elevation: Datum Local Official's Name Title Community Name Telephone Signature Date Comments (including type of equipment and location, per C2(e), if applicable) Check here if attachments.

BUILDING PHOTOGRAPHS

ELEVATION CERTIFICATE

See Instructions for Item A6.

OMB No. 1660-0008

Expiration Date: November 30, 2022

IMPORTANT: In these spaces, co	ppy the corresponding information	on from Section A.	FOR INSURANCE COMPANY USE
Building Street Address (including 150 East First Street	Apt., Unit, Suite, and/or Bldg. No.)	or P.O. Route and Box No.	Policy Number:
City	State	ZIP Code	Company NAIC Number
Boca Grande	Florida	33921	

If using the Elevation Certificate to obtain NFIP flood insurance, affix at least 2 building photographs below according to the instructions for Item A6. Identify all photographs with date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8. If submitting more photographs than will fit on this page, use the Continuation Page.



Photo One

Photo One Caption

Front View Taken 07/21/2020

Clear Photo One



Photo Two Caption

Rear View Taken 07/21/2020

Clear Photo Two

BUILDING PHOTOGRAPHS

ELEVATION CERTIFICATE

Continuation Page

OMB No. 1660-0008

Expiration Date: November 30, 2022

IMPORTANT: In these spaces, co	ppy the corresponding information	on from Section A.	FOR INSURANCE COMPANY USE
Building Street Address (including 150 East First Street	Apt., Unit, Suite, and/or Bldg. No.)	or P.O. Route and Box No.	Policy Number:
City	State	ZIP Code	Company NAIC Number
Boca Grande	Florida	33921	

If submitting more photographs than will fit on the preceding page, affix the additional photographs below. Identify all photographs with: date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8.



Photo Three

Photo Three Caption

Left Side Taken 07/21/2020

Clear Photo Three



Photo Four

Photo Four Caption Right Side Taken 07/21/2020

Clear Photo Four



Most Widely Accepted and Trusted

ICC-ES Report

ICC-ES | (800) 423-6587 | (562) 699-0543 | www.icc-es.org

ESR-2074

Reissued 02/2017 This report is subject to renewal 02/2019.

DIVISION: 08 00 00—OPENINGS

SECTION: 08 95 43—VENTS/FOUNDATION FLOOD VENTS

REPORT HOLDER:

SMARTVENT PRODUCTS, INC.

430 ANDBRO DRIVE, UNIT 1 PITMAN, NEW JERSEY 08071

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511: #1540-570; #1540-574; #1540-524; #1540-514



"2014 Recipient of Prestigious Western States Seismic Policy Council (WSSPC) Award in Excellence"









ICC-ES Evaluation Reports are not to be construed as representing aesthetics or any other attributes not specifically addressed, nor are they to be construed as an endorsement of the subject of the report or a recommendation for its use. There is no warranty by ICC Evaluation Service, LLC, express or implied, as to any finding or other matter in this report, or as to any product covered by the report.



ICC-ES Evaluation Report

ESR-2074

Reissued February 2017
This report is subject to renewal February 2019.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00—OPENINGS

Section: 08 95 43—Vents/Foundation Flood Vents

REPORT HOLDER:

SMARTVENT PRODUCTS, INC. 430 ANDBRO DRIVE, UNIT 1 PITMAN, NEW JERSEY 08071 (877) 441-8368 www.smartvent.com

info@smartvent.com

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514

1.0 EVALUATION SCOPE

Compliance with the following codes:

- 2015, 2012, 2009 and 2006 International Building Code® (IBC)
- 2015, 2012, 2009 and 2006 International Residential Code® (IRC)
- 2013 Abu Dhabi International Building Code (ADIBC)[†]

[†]The ADIBC is based on the 2009 IBC. 2009 IBC code sections referenced in this report are the same sections in the ADIBC.

Properties evaluated:

- Physical operation
- Water flow

2.0 USES

The Smart Vent® units are engineered mechanically operated flood vents (FVs) employed to equalize hydrostatic pressure on walls of enclosures subject to rising or falling flood waters. Certain models also allow natural ventilation.

3.0 DESCRIPTION

3.1 General:

When subjected to rising water, the Smart Vent[®] FVs internal floats are activated, then pivot open to allow flow in either direction to equalize water level and hydrostatic pressure from one side of the foundation to the other. The FV pivoting door is normally held in the closed position by a buoyant release device. When subjected to rising water, the buoyant release device causes the unit to unlatch, allowing the door to rotate out of the way and allow flow.

The water level stabilizes, equalizing the lateral forces. Each unit is fabricated from stainless steel. Smart Vent® Automatic Foundation Flood Vents are available in various models and sizes as described in Table 1. The SmartVENT® Stacking Model #1540-511 and FloodVENT® Stacking Model #1540-521 units each contain two vertically arranged openings per unit.

3.2 Engineered Opening:

The FVs comply with the design principle noted in Section 2.7.2.2 and Section 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)] for a maximum rate of rise and fall of 5.0 feet per hour (0.423 mm/s). In order to comply with the engineered opening requirement of ASCE/SEI 24, Smart Vent FVs must be installed in accordance with Section 4.0.

3.3 Ventilation:

The SmartVENT® Model #1540-510 and SmartVENT® Overhead Door Model #1540-514 both have screen covers with ¹/₄-inch-by-¹/₄-inch (6.35 by 6.35 mm) openings, yielding 51 square inches (32 903 mm²) of net free area to supply natural ventilation. The SmartVENT® Stacking Model #1540-511 consists of two Model #1540-510 units in one assembly, and provides 102 square inches (65 806 mm²) of net free area to supply natural ventilation. Other FVs recognized in this report do not offer natural ventilation.

4.0 DESIGN AND INSTALLATION

SmartVENT® and FloodVENT® are designed to be installed into walls or overhead doors of existing or new construction from the exterior side. Installation of the vents must be in accordance with the manufacturer's instructions, the applicable code and this report. Installation clips allow mounting in masonry and concrete walls of any thickness. In order to comply with the engineered opening design principle noted in Section 2.7.2.2 and 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)], the Smart Vent® FVs must be installed as follows:

- With a minimum of two openings on different sides of each enclosed area.
- With a minimum of one FV for every 200 square feet (18.6 m²) of enclosed area, except that the SmartVENT® Stacking Model #1540-511 and FloodVENT® Stacking Model #1540-521 must be installed with a minimum of one FV for every 400 square feet (37.2 m²) of enclosed area.
- Below the base flood elevation.



With the bottom of the FV located a maximum of 12 inches (305.4 mm) above the higher of the final grade or floor and finished exterior grade immediately under each opening.

5.0 CONDITIONS OF USE

The Smart Vent® FVs described in this report comply with, or are suitable alternatives to what is specified in, those codes listed in Section 1.0 of this report, subject to the following conditions:

- 5.1 The Smart Vent® FVs must be installed in accordance with this report, the applicable code and the manufacturer's installation instructions. In the event of a conflict, the instructions in this report govern.
- 5.2 The Smart Vent® FVs must not be used in the place of "breakaway walls" in coastal high hazard areas, but

are permitted for use in conjunction with breakaway walls in other areas.

6.0 EVIDENCE SUBMITTED

Data in accordance with the ICC-ES Acceptance Criteria for Mechanically Operated Flood Vents (AC364), dated August 2015.

7.0 IDENTIFICATION

The Smart VENT® models recognized in this report must be identified by a label bearing the manufacturer's name (Smartvent Products, Inc.), the model number, and the evaluation report number (ESR-2074).

TABLE 1—MODEL SIZES

MODEL NAME	MODEL NUMBER	MODEL SIZE (in.)	COVERAGE (sq. ft.)
FloodVENT [®]	1540-520	15 ³ / ₄ " X 7 ³ / ₄ "	200
SmartVENT [®]	1540-510	15 ³ / ₄ " X 7 ³ / ₄ "	200
FloodVENT® Overhead Door	1540-524	15 ³ / ₄ " X 7 ³ / ₄ "	200
SmartVENT® Overhead Door	1540-514	15 ³ / ₄ " X 7 ³ / ₄ "	200
Wood Wall FloodVENT®	1540-570	14" X 8 ³ / ₄ "	200
Wood Wall FloodVENT® Overhead Door	1540-574	14" X 8 ³ / ₄ "	200
SmartVENT® Stacker	1540-511	16" X 16"	400
FloodVent® Stacker	1540-521	16" X 16"	400

For SI: 1 inch = 25.4 mm; 1 square foot = m^2

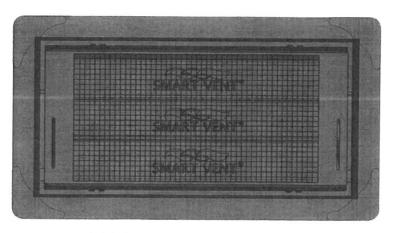


FIGURE 1-SMART VENT: MODEL 1540-510

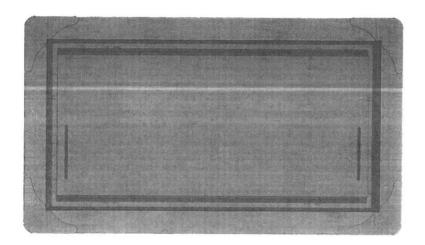


FIGURE 2—SMART VENT MODEL 1540-520

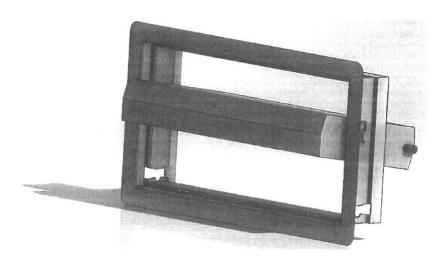


FIGURE 3—SMART VENT: SHOWN WITH FLOOD DOOR PIVOTED OPEN



ICC-ES Evaluation Report

ESR-2074 FBC Supplement

Reissued February 2017

This report is subject to renewal February 2019.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00—OPENINGS

Section: 08 95 43—Vents/Foundation Flood Vents

REPORT HOLDER:

SMARTVENT PRODUCTS, INC. 430 ANDBRO DRIVE, UNIT 1 PITMAN, NEW JERSEY 08071 (877) 441-8368 www.smartvent.com info@smartvent.com

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-514

1.0 REPORT PURPOSE AND SCOPE

Purpose:

The purpose of this evaluation report supplement is to indicate that Smart Vent® Automatic Foundation Flood Vents, recognized in ICC-ES master report ESR-2074, have also been evaluated for compliance with the codes noted below.

Applicable code editions:

- 2014 Florida Building Code—Building (FBC)
- 2014 Florida Building Code—Residential (FRC)

2.0 CONCLUSIONS

The Smart Vent® Automatic Foundation Flood Vents, described in Sections 2.0 through 7.0 of the master evaluation report ESR-2074, comply with the FBC and the FRC, provided the design and installation are in accordance with the *International Building Code®* provisions noted in the master report.

Use of the Smart Vent® Automatic Foundation Flood Vents has also been found to be in compliance with the High-Velocity Hurricane Zone provisions of the FBC and the FRC.

For products falling under Florida Rule 9N-3, verification that the report holder's quality assurance program is audited by a quality assurance entity approved by the Florida Building Commission for the type of inspections being conducted is the responsibility of an approved validation entity (or the code official when the report holder does not possess an approval by the Commission).

This supplement expires concurrently with the master report, reissued February 2017.

